

# UELZENER

MASCHINEN GMBH




## UELZENER S60GA-3


Mixing pump for quick setting gypsum



# The modules of the unit UELZENER S60-GA3

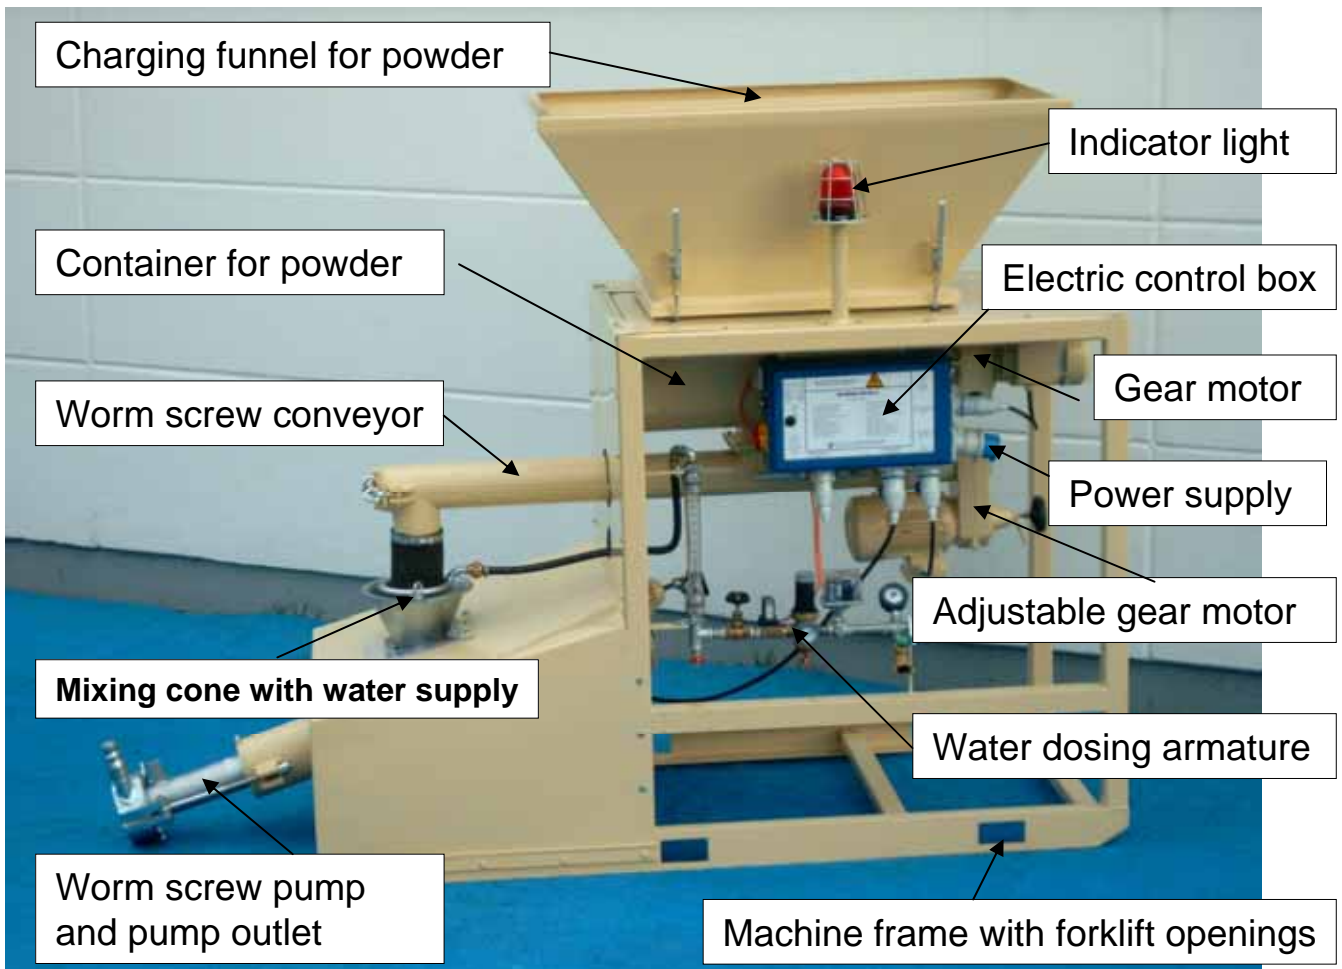

View to the mixing cone with water torus

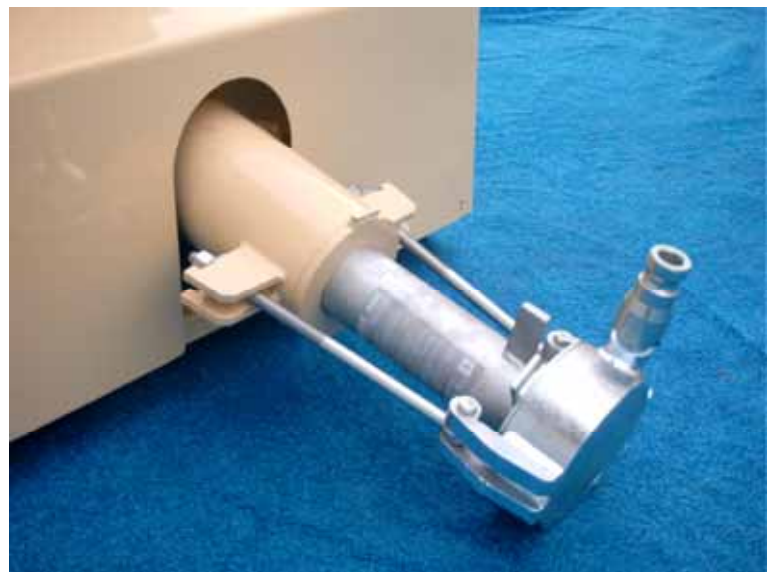

View to the worm pump, shown with re-mixer and pump outlet

# UELZENER S60GA-3

## Technical data

Pump drive	: adjustable gear motor
Power	: 4 kW
Speed	: 60 – 482 min <sup>-1</sup>
Conveying worm drive	: adjustable gear motor
Power	: 1,5 kW
Speed	: 30 – 150 min <sup>-1</sup>
Worm screw conveyor drive	: constant gear motor
Power	: 1,1 kW
Speed	: 50 min <sup>-1</sup>
Electric supply	: Socket CEE 532/9h (5 pole-system)
Voltage	: 220V / 50Hz three phase
Control voltage	: 42V / 50Hz
Output *	: interchangeable worm pump types to preset the output Type UE 4 silver for approx. 10 – 30 l/min* (standard) Type UE 8 for approx. 15 – 40 l/min* Type UE 45/7 for approx. 20 -- 45 l/min*
	*) depending of type of worm pump, motor speed and conveying pressure
Pump pressure	: max 20 bars, depending of type of worm pump
Pump outlet	: Quick-action coupling SKM35, ID25
Water supply size	: min 3/4"
Required water pressure	: min 4 bars
Dimensions	: length/ width/ height: 2600 x 950 x 1850 (standard)
Weight	: 500 kg (standard version)

## UELZENER MACHINEN GMBH

Wiesenstrasse 18  
D-65843 Sulzbach/Taunus, Germany  
Tel. +49-6196-584-0 Fax: +49-6196-71273  
e-mail: [contact@uelzener-ums.de](mailto:contact@uelzener-ums.de)  
Internet: [www.uelzener-ums.de](http://www.uelzener-ums.de)